

Curtain – Technical features








Types	Weight – Thickness	Temperature range	Burning test	Standard	Optional
A PVC curtain	1300g/m ² – 1,3mm	-40°C → +70°C	[ISO 3795] <100mm/min	DynamicRoll	/
B PVC curtain	900g/m ² – 0,9mm	-40°C → +70°C	[ISO 3795] <100mm/min	Pack – Roll	/
C Insulatd curtain	1300g/m ² – 3,0mm	-10°C → +70°C	NA	/	All models
D Food curtain (FDA)	1500g/m ² – 1,5mm	-40°C → +70°C	NA	/	DynamicRoll

Standard available colors


 A B	 A B	 A B	 A B	 A B C	 B	 A B	 B
Simil RAL 1003	Simil RAL 1015	Simil RAL 2004	Simil RAL 3002	Simil RAL 5002	Simil RAL 5010	Simil RAL 5012	Simil RAL 6018
 A B C	 A B	 A B C	 A B	 B	 B	 B	 A B C D
Simil RAL 6026	Simil RAL 7035	Simil RAL 7037	Simil RAL 7042	Simil RAL 8014	Simil RAL 9005	Simil RAL 9006	Simil RAL 9010

Windows and transparent sections

Windows and transparent sections*	Description	DynamicRoll	Roll	Pack
	Rectangular windows (1200×300mm)	×	×	×
	Round corners windows (1200×300mm)	×	×	×
	Circular windows (Diametro 600mm)	×		
	Transparent sections (Height 500mm)	×	×	
	Full vision sections	×		

* In transparent PVC or in micromesh

Emergency exit: T cut on the curtain

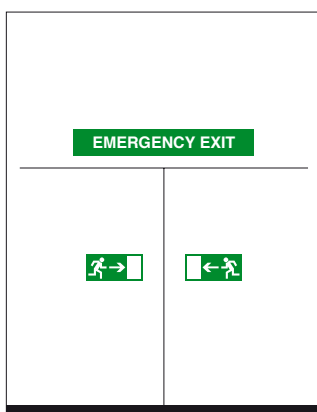

Standard sizes	min	max
DynamicRoll dimensions	1500×2100	H 4000
EMERGENCY EXIT dimensions	1200×2100	2400×2100

Accessories

Pictograms
EMERGENCY EXIT indication